Energizer
Central/Eastern European Region
+ 44 (0) 208 920 2306
www.energizer.eu

Ultimate (6LR61)

9V

Specifications

Classification:	Alkaline
Chemical System:	Zinc-Manganese Dioxide (Zn/MnO_2) No added mercury or cadmium
Designation:	IEC-6LR61
Nominal Voltage:	1.5 volts
Operating Temp:	-18°C to 55°C
Typical Weight:	46.0 grams
Typical Volume:	21.0 cubic centimeters
Jacket:	Metal
Shelf Life:	5 years at 21°C (80% of initial capacity)
Terminal:	Miniature Snap

Industry Standard Dimensions

(millimeters)

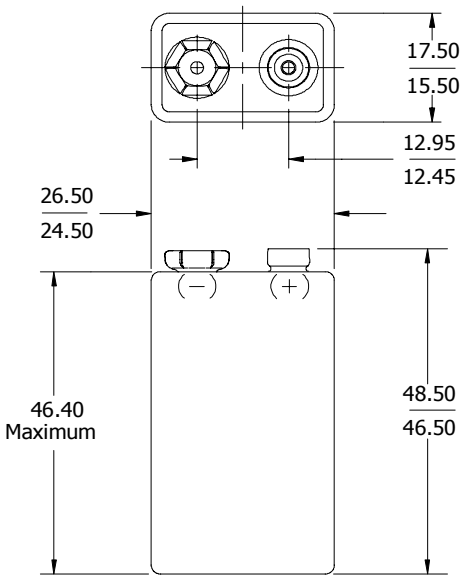

Milliamp-Hours Capacity

Continuous discharge to 4.8 volts at 21°C

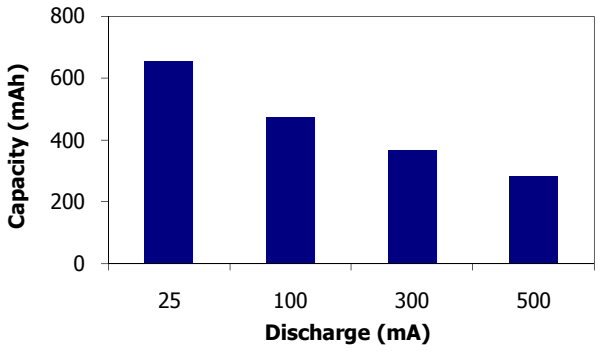

Industry Standard Testing (21°C):

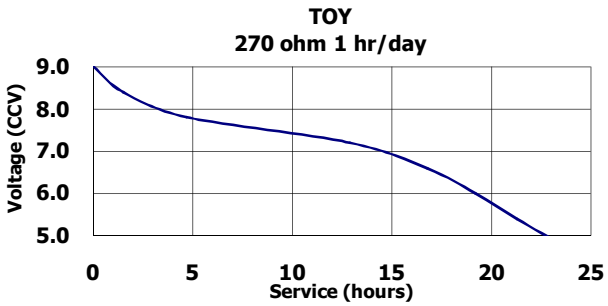

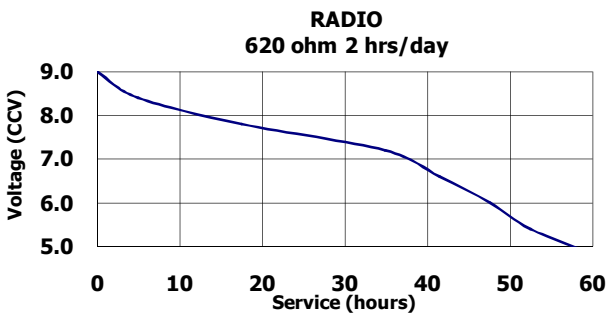

Battery Selection Indicator

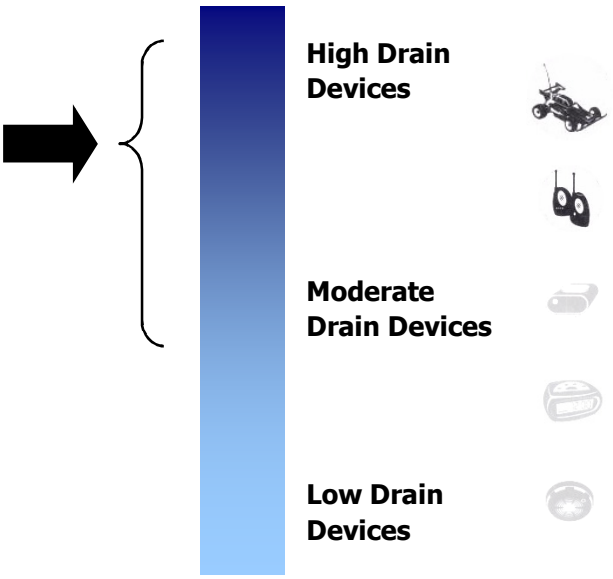

Important Notice

This data sheet contains typical information specific to products manufactured at the time of its publication.

©Energizer Holdings, Inc. - Contents herein do not constitute a warranty.